

Open Frame LCD

Open Frame LCD



6.5"


Specifications

RoHS
COMPLIANT
2002/95/EC

Model Name	R06L200-OFA1
Viewable Size Image	6.5"
Active Display Area(mm)	132.48(H)x99.36(V)
Pixel Pitch(mm)	0.207(H)x0.207(V)
Number of Pixels	640x480
Contrast Ratio	600:1(typ.)
Display Color	262,144(6bit/colors)
Brightness(cd/m ²)	700(typ.)
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)
Synchronization Range	
Horizontal/Vertical	31.5~37.5KHz/60~75Hz
Recommended Resolution	640x480@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	10W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive

Remarks:R06L200 series= VGA input only
R06L230 series= VGA+Video Input

Mechanical Drawing

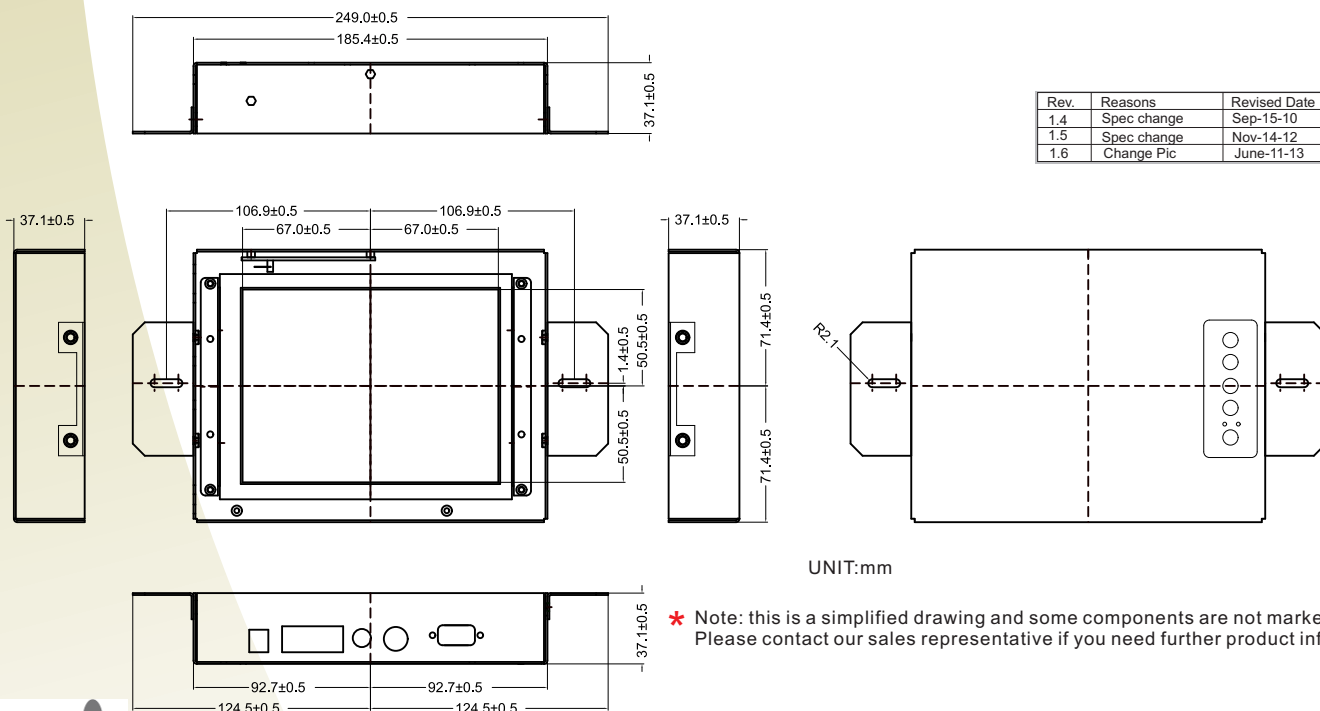

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.