


Open Frame LCD

Open Frame LCD

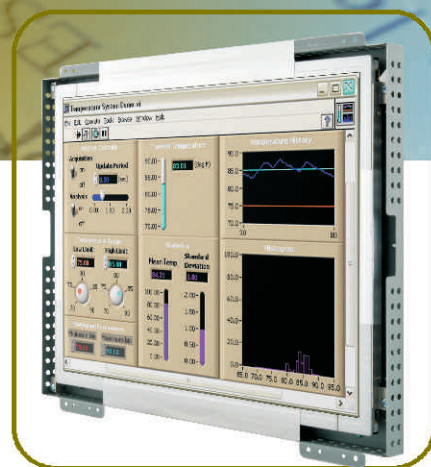

15"

Specifications




| | |
|--------------------------------|---|
| Model Name | R15L600-OFC3 |
| Viewable Size Image | 15" |
| Active Display Area(mm) | 304.1(H)x228.1(V) |
| Pixel Pitch(mm) | 0.297(H)x0.297(V) |
| Number of Pixels | 1024x768 |
| Contrast Ratio | 700:1(typ.) |
| Display Color | 16.2M |
| Brightness(cd/m ²) | 250(typ.) |
| Viewing Angle(CR>=10) | -80~80(H); -70~70(V) |
| Synchronization Range | 31.5~60.0KHz/60~75Hz |
| Horizontal/Vertical | |
| Recommended Resolution | 1024x768@60Hz,75Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption | 15W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | Resistive, Capacitive, SAW, IR |

Remarks:R15L600 series= VGA input only

R15L630 series= VGA+Video Input

Mechanical Drawing

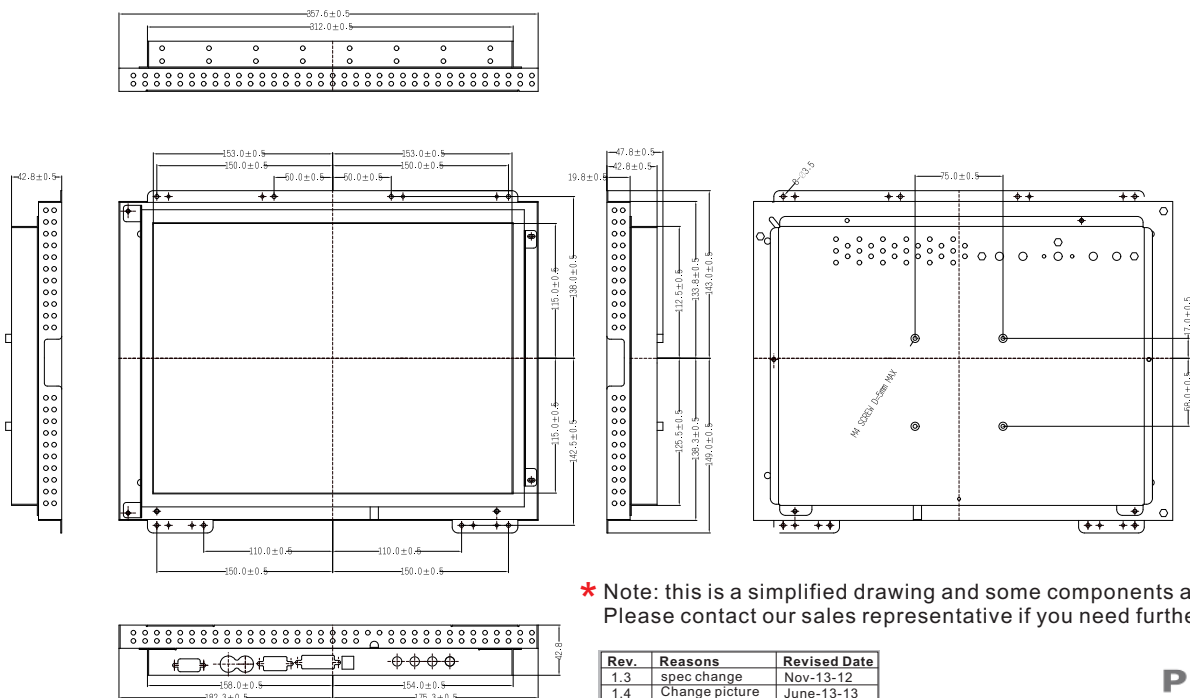

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

| Rev. | Reasons | Revised Date |
|------|----------------|--------------|
| 1.3 | spec change | Nov-13-12 |
| 1.4 | Change picture | June-13-13 |
| 1.5 | spec change | Jan-07-14 |

www.primarynetworks.co.uk

