

Model:R10IH3S-VMT2

Product Features:


- Intel Core i5-5200U Broadwell 2.2GHz (turbo to 2.7GHz)
- High Quality 10.4" Panel, 1024 x 768 resolution
- Full IP65 Dust / Water Proof Enclosures (Except I/O parts)
- Aluminum Housing with Anti-Corrosion Treatments
- Anti-Shock and Vibration Standard according to MIL-STD-810G & IEC60068-2-27
- 5 Wire Resistive / Infrared Touchscreen / Anti-Reflective Protection Glass (Optional)
- Optional GPS, 3G / WLAN(Either one). Digital IO / Canbus (Either one)
- Wide Range 9 to 36V DC Input Acceptable
- Optional 6-60V DC Input, and Optional for Ignition On/Off delay
- Compliance with EN50155

Product Specifications:

Display	Model Name	R10IH3S-VMT2
	Size	10.4"
	Resolution (pixels)	1024 x 768
	Number of Colors	16.2M (6 bits+FRC)
	Brightness (cd/m ²)	350 (typ.)
	Contrast Ratio	1200 :1 (typ.)
	Viewing Angle	-88~88 (H) ; -88~88 (V)
	Active Area	201.4 (H) x 157.8 (V)
System	Touch (optional)	5 Wire Resistive / IR Touch
	Processor	Intel Core i5-5200U Broadwell 2.2GHz (turbo to 2.7GHz)
	BIOS	AMI System BIOS
	Memory	1xDDR3L 1600 MHz SO-DIMM default 2 GB, Max. 16GB
	Ethernet	Intel® Ethernet Controller 1211-AT + Intel® Gigabit Ethernet PHY 1218-LM
	Storage	Default 64GB mSATA MLC SSD Max.512GB
Input / Output	Expansion Slot	1 x Mini PCIe slot (for USB module)
	Back Panel I/O Port	2 x RJ-45 (10/100/1000 Mbps)
		1 x HDMI
		1 x DC-in Jack (Phoenix type)
2 x USB 3.0		
Environment	Operating Temperature	-25 deg.C to 60 deg.C
	Storage Temperature	-30 deg.C to 70 deg.C
	Humidity	10% to 95% (non condensing)
	Shock*	Operating:30g for 18ms, 300m/s ²
	Vibration*	Operating: 1.60/1.96/2.18 g rms for XYZ / 5-500Hz
	Power Input	9~36V DC in (Phoenix type) Optional 6-60V DC in, with Ignition On/Off delay
Mechanical	Power Consumption	32W typ.
	Dimensions (W x L x H)	315 mm x 250 mm x 67 mm
	Approximate Weight	3.3Kg*
Driver OS Support	*Weight of this device will be more or less depending upon actual component configuration	
Packing List	Windows Embedded Standard 7 (64-bit) Windows Embedded 8.1 Industry Pro 64-bit Windows 10 IoT Enterprise (IH32) SBC Manual & Driver CD	
Product Optional Items	Mounting Bracket and Kits	One robust bracket with locking handle (Can adjust from -5 deg.C to 90 deg.C)
	Sunlight Readable	Transflective film enhancement for optional
	Anti-reflective Glass	3 mm (Replace touch)
	WLAN / 3G	Either one
	GPS	USB interface
Security Support	Digital IO / Canbus	Either one
		Trusted Platform Module (TPM 1.2)




I / O View:

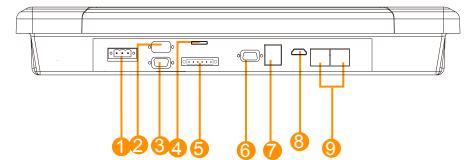

1. 9~36V Terminal Block
2. RS-232 (Optional)
3. RS-232
4. SIM Card Slot (Optional)
5. CanBus / DIO (Optional)
6. RS232/422/485
7. 2xUSB 3.0
8. HDMI
9. 2xRJ45

Front OSD Control Function:

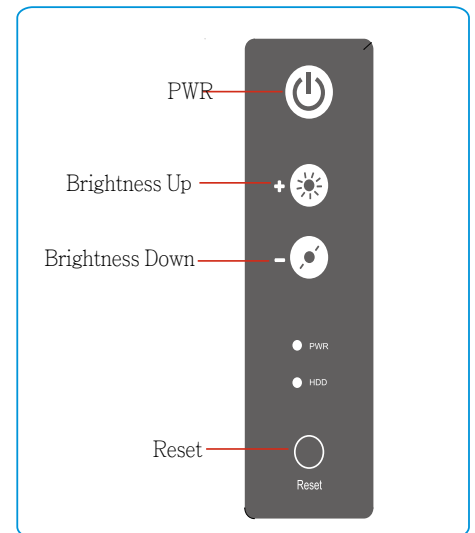

Drawing w / Mounting bracket:

